CPY□0-2 荧光蓬顶灯

CPY□0-2 Fluorescent Ceiling Light

4

应用场所 Application

- 适用于船舶一般舱室或内走道，如船员居住舱、餐厅、驾驶室、报务室等场所。
- Applicable in general cabin, inner aisles of ships, such as crew living spaces, restaurants, cabs, and radio rooms, etc.

型号含义 Catalogue Number Logic

CPY □ 0 – □ □ □ □ □

- E: 电子镇流器(不配不注) Electric ballast (optional)
- R: 电感镇流器 Inductive ballast
- S: 不锈钢(钢不注) Stainless steel (no need to note for steel)
- J: 舰船减震 Shock absorption for ship
- E: 集中电源 Centralized power
- ZE: 自带电源 Self contained power
- 灯管数量 Lamp tube number
- 设计序号 Design No.
- 功率 Power 2: 18W 4: 36W
- 船用荧光蓬顶灯 Marine fluorescent ceiling light

配光性能 Photometric data

cd/1000lm



CPY□0-2 荧光蓬顶灯
CPY□0-2 Fluorescent Ceiling Light

技术参数 Technical parameters

◆ 执行标准 **Compliance**	CCS入级规范 (CCS standard)
◆ 产品外壳 **Enclosure**	采用优质钢板或不锈钢焊接成型，透明罩采用优质亚克力。 Enclosure is welding formed, of high quality steel plate or stainless steel, with high quality acrylic transparent cover
◆ 控制电器 **Control equipment**	内装高效节能型镇流器，高功率因素 Built-in efficient and energy-saving ballast, of high power factor
◆ 额定电压 **Rated voltage**	110V/60Hz　220V/50Hz　220V/60Hz
◆ 额定功率 **Rated power**	
光源类型 Light source	T8荧光灯管 T8 fluorescent lamp tube
灯具功率 Power of lamp	18W×2　36W×2
◆ 灯　座 **Lamp holder**	G13
◆ 防护等级 **Degree of protection**	IP22
◆ 防腐等级 **Corrosion-proof**	WF2
◆ 温度范围 **Temperature range**	–25℃~+55℃
◆ 电缆外径 **Cable outer diameter**	ϕ10~ϕ14mm
◆ 自带电源型应急参数 **Data for lamp with self-contained power source**	
应急启动时间 Emergency start time	0.3s
应急照明时间 Emergency lighting time	90min
应急形式 Emergency mode	单管应急 single tube
充电时间 Charge time	24h
◆ 集中电源型应急参数 **Data for lamp with centralized power source**	灯具配B15d灯座，应急功率15W，用于24V应急照明，灯罩边缘标有红色“●”标志 Lamp is equipped with B15d lamp holder, emergency power 15W, suitable for 24V emergency lighting, the edge of lampshade is with red marking “●”

选配表及外形尺寸 Selection table and outline dimension

型 号 Type	功率(W) Power	重量(kg) Weight	安装尺寸 Size			
			L	L1	L2	n
CPY20-2	18×2	6.9	680	646	300	6
CPY40-2	36×2	10.5	1290	1256	400	8

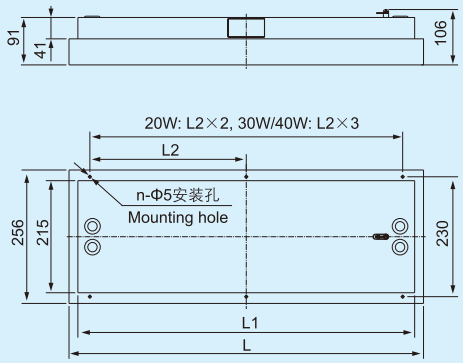

- ◆ 灯具出厂时不配光源，由用户自配；
- ◆ 订货时，请注明电压、频率。
- ◆ The lamp is designed without light source, it should be supplied by user;
- ◆ Please specify the voltage, frequency when ordering.

CPY□1-2 荧光棚顶灯

CPY□1-2 Fluorescent Ceiling Light

CPY21-2

CPY21-4

应用场所 Application

- 适用于船舶一般舱室或内走道，如船员居住舱、餐厅、驾驶室、报务室等场所。
- Applicable in general cabin, inner aisles of ships, such as crew living spaces, restaurants, cabs, and radio rooms, etc.

型号含义 Catalogue Number Logic

CPY □ 1 – □ □ □ □ □

- E: 电子镇流器(不配不注) Electric ballast (optional)
- R: 电感镇流器 Inductive ballast
- S: 不锈钢(钢不注) Stainless steel (no need to note for steel)
- J: 舰船减震 Shock absorption for ship
- E: 集中电源 Centralized power
- ZE: 自带电源 Self contained power
- 灯管数量 Lamp tube number
- 设计序号 Design No.
- 功率 Power 2: 18W 4: 36W
- 船用荧光蓬顶灯 Marine fluorescent ceiling light

配光性能 Photometric data

cd/1000lm

c 0 / 180
c 90 / 270



CPY□1-2 荧光棚顶灯
CPY□1-2 Fluorescent Ceiling Light

技术参数 Technical parameters

◆ 执行标准 **Compliance**	CCS入级规范 (CCS standard)
◆ 产品外壳 **Enclosure**	采用优质钢板或不锈钢焊接成型，透明罩采用优质亚克力。 Enclosure is welding formed, of high quality steel plate or stainless steel, with high quality acrylic transparent cover
◆ 控制电器 **Control equipment**	内装高效节能型镇流器，高功率因素 Built-in efficient and energy-saving ballast, of high power factor
◆ 额定电压 **Rated voltage**	110V/60Hz　220V/50Hz　220V/60Hz
◆ 额定功率 **Rated power**	
光源类型 Light source	T8荧光灯管 T8 fluorescent lamp tube
灯具功率 Power of lamp	18W×2　36W×2
◆ 灯　座 **Lamp holder**	G13
◆ 防护等级 **Degree of protection**	IP44 / IP22
◆ 防腐等级 **Corrosion-proof**	WF2
◆ 温度范围 **Temperature range**	–25℃~+55℃
◆ 电缆外径 **Cable outer diameter**	ϕ10~ϕ14mm
◆ 自带电源型应急参数 **Data for lamp with self-contained power source**	
应急启动时间 Emergency start time	0.3s
应急照明时间 Emergency lighting time	90min
应急形式 Emergency mode	单管应急 single tube
充电时间 Charge time	24h
◆ 集中电源型应急参数 **Data for lamp with centralized power source**	灯具配B15d灯座，应急功率15W，用于24V应急照明，灯罩边缘标有红色“●”标志 Lamp is equipped with B15d lamp holder, emergency power 15W, suitable for 24V emergency lighting, the edge of lampshade is with red marking “●”

选配表及外形尺寸 Selection table and outline dimension

型号 Type	功率(W) Power	重量(kg) Weight	安装尺寸 Size					
			L	L1	L2	W1	W2	W3
CPY21-2	18×2	6.9	675	632	200	207	230	250
CPY41-2	36×2	8.5	675	632	200	307	330	350
CPY21-4	14×4	9.0	1285	1242	400	207	230	250



CPY21-4

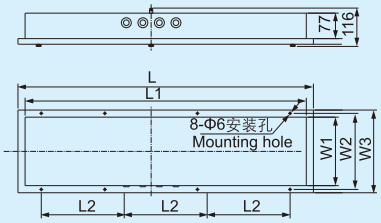

CPY□1-2

◆ 灯具出厂时不配光源，由用户自配；
◆ 订货时，请注明电压、频率。
◆ The lamp is designed without light source, it should be supplied by user;
◆ Please specify the voltage, frequency when ordering.

CPY□2-2 荧光蓬顶灯

CPY□2-2 Fluorescent Ceiling Light

4

应用场所 Application

- 适用于船舶一般舱室或内走道，如船员居住舱、餐厅、驾驶室、报务室等场所。
- Applicable in general cabin, inner aisles of ships, such as crew living spaces, restaurants, cabs, and radio rooms, etc.

型号含义 Catalogue Number Logic

CPY □ 2 – □ □ □ □

- E: 电子镇流器(不配不注) Electric ballast (optional)
- R: 电感镇流器 Inductive ballast
- S: 不锈钢(钢不注) Stainless steel (no need to note for steel)
- E: 集中电源 Centralized power
- ZE: 自带电源 Self contained power
- 灯管数量 Lamp tube number
- 设计序号 Design No.
- 功率 Power 2: 18W 4: 36W
- 船用荧光蓬顶灯 Marine fluorescent ceiling light

配光性能 Photometric data

cd/1000lm



CPY□2-2 荧光蓬顶灯
CPY□2-2 Fluorescent Ceiling Light

技术参数 Technical parameters

◆ 执行标准 **Compliance**	CCS入级规范 (CCS standard)
◆ 产品外壳 **Enclosure**	采用优质钢板或不锈钢焊接成型，透明罩采用优质亚克力。 Enclosure is welding formed, of high quality steel plate or stainless steel, with high quality acrylic transparent cover
◆ 控制电器 **Control equipment**	内装高效节能型镇流器，高功率因素 Built-in efficient and energy-saving ballast, of high power factor
◆ 额定电压 **Rated voltage**	110V/60Hz　220V/50Hz　220V/60Hz
◆ 额定功率 **Rated power**	
光源类型 Light source	T8荧光灯管 T8 fluorescent lamp tube
灯具功率 Power of lamp	18W×2　36W×2
◆ 灯　座 **Lamp holder**	G13
◆ 防护等级 **Degree of protection**	IP44
◆ 防腐等级 **Corrosion-proof**	WF2
◆ 温度范围 **Temperature range**	–25℃~+55℃
◆ 电缆外径 **Cable outer diameter**	ϕ10~ϕ14mm
◆ 自带电源型应急参数 **Data for lamp with self-contained power source**	
应急启动时间 Emergency start time	0.3s
应急照明时间 Emergency lighting time	90min
应急形式 Emergency mode	单管应急 single tube
充电时间 Charge time	24h
◆ 集中电源型应急参数 **Data for lamp with centralized power source**	灯具配B15d灯座，应急功率15W，用于24V应急照明，灯罩边缘标有红色“●”标志 Lamp is equipped with B15d lamp holder, emergency power 15W, suitable for 24V emergency lighting, the edge of lampshade is with red marking “●”

选配表及外形尺寸 Selection table and outline dimension

型 号 Type	功率(W) Power	重量(kg) Weight
CPY22-2	18×2	6.8
CPY42-2	36×2	9.4

- 灯具出厂时不配光源，由用户自配；
- 订货时，请注明电压、频率。
- The lamp is designed without light source, it should be supplied by user;
- Please specify the voltage, frequency when ordering.

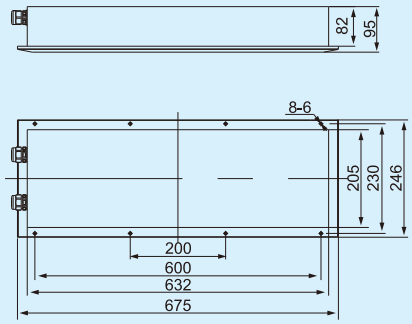

CPY22

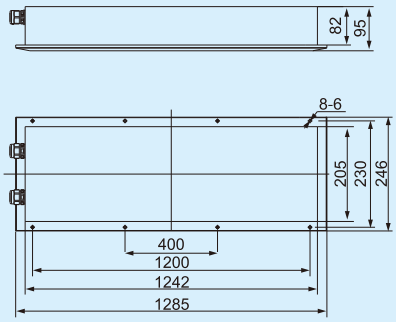

CPY42